


## PE-D Series Fully Automated Sleeve Wrappers



### Features:

- Two single wound films are placed on to the upper and lower side film carriage rollers
- Top and bottom motorized film drive and relevant film advance balancer attachments
- Direct driven infeed belt for automatic infeed
- Automatic discharge belt until heat tunnel
- Photo eye control for package infeed
- Constantly sealer bar to give two seals with a center cut fitted with a cartridge heater
- Digital temperature controller to give consistency of seal with a thermocouple control
- Pneumatic cylinder and double heavy duty linear bearings for accurate motion
- Easy to change rubber and teflon set on the bottom jaw
- PLC programmed software for customized inquiries and flexibility
- Detection sensor against package or hand entrapment
- Optional holder to keep the package steady during sealing by soft vertical cylinder
- Maximum height adjustment for the jaw
- Complete closed housing with limit switch controlled windows for security
- ISO 9001 quality standard with the relevant norm's confirmations
- CE marking
- Manufacturer's guarantee for spare part stock and after sales support.
- One year warranty on non-wearable parts

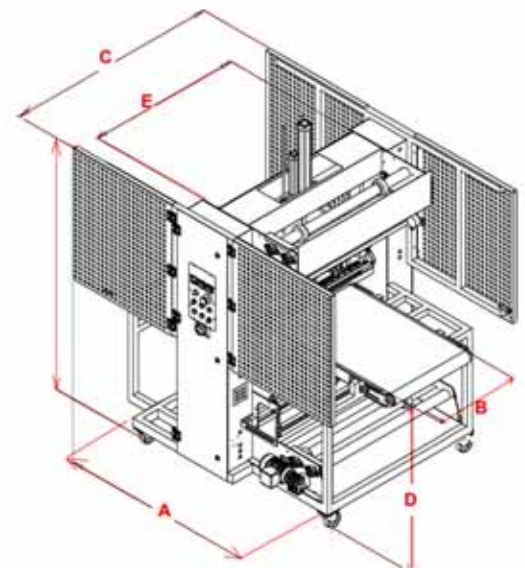

Models	Dimensions a x b x c x d x e x h (mm)	Seal bar Length (mm)	Air supply (per cycle)	Max.film width (mm)	Power supply 400V, 3ph	Consumption (Max/Avg)	Capacity	Weight Net/ Crated
PE60-D Code: Y12 098 0252	2070x600x1285x980x870x1840	640	6 Bar 5dm <sup>3</sup> 304in <sup>3</sup>	700	4 Amper	2,0 / 1,1kW	10-15 packs/min	170/28 5kg
PE80-D Code: Y12 098 0202	2070x600x1485x980x1070x1840	840		900	4 Amper	2,2 / 1,2kW		196/28 5kg
PE120-D Code: Y12 098 0302	2070x800x1885x980x1470x1840	1240		1300	6 Amper	3,0 / 1,5kW		235/37 5kg
PE150-D Code: Y12 098 0402	2070x1200x2185x980x1770x1840	1540		1600	7 Amper	3,5 / 1,8kW		286/46 5kg
Color: Metallic dark gray (RAL code: custom color)								
Warranty: One year on non-wearable parts								